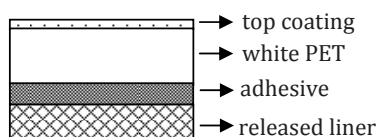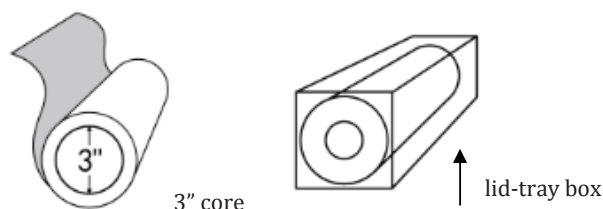# Whiteboard Film

Snijfolies & Applicatie Tapes

FEATURES AND ADVANTAGES:

- High gloss whiteboard with adhesive back
- Compatible to apply on wall and door
- Premium PET base, good weather resistance, excellent for durable indoor using.

CONSTRUCTION DRAWING:

→ top coating
→ white PET
→ adhesive
→ released liner

PACKAGING:

3" core

lid-tray box

REWRITABLE DATA:

- Rewritable Useful Time: 20000 times (tested with the whiteboard writing testing machine under ambient temperature and humidity)
- Erase Limitation: For normal whiteboard marker pen, marks can be dry erased off within one month. If the marks leave on a whiteboard for long enough and can't be dry erased, please use Whiteboard Cleaner or some alcoholic liquid to get them off.

ADHESION DATA:

GB/T 4852-2002– Test method for tack of pressure sensitive adhesive tapes by rolling ball   7#

PHYSICAL DATA:

Total thickness	200μm (±19)
Weight	220g/M2 (±22)
Whiteness	[80, 90]
Gloss 60°	[90, 110]
Water resistance	High
UV resistance	Medium
Relative high temperature Operating ranges:	
Long term (days, weeks)	60℃
Short term (minutes)	100℃

PROCESS AND STORAGE:

- Working condition: temperature 15℃ to 30℃, and relative humidity 30% to 60%.
- Storage condition: closed preserve avoiding sunlight, in temperature 10℃ to 35℃, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed.